WINNTEC

Premium

FL8214E – 4.5 ton Clear floor - Electric release



012 664 3556

www.integratedmarketing.co.za

Model: FL8214E

Product: 4.5 Ton electric release - Clear floor

Description: Clear Floor lift version has no obstruction between the 2 posts. They are considered ideal for when transmission jacks are constantly in use or cars with a low ride height. The steel ropes and hydraulic pipes go over the top.

Features:	**Benefits:**
Electric release	Less physical labor
Clear floor design	The hydraulic hose and equalization cables run across the top of the lift through a metal bar (conduit) that connects both columns in the Overhead lift. The metal bar (conduit) is there to guide the hose and cables and is not designed to support any vertical weight. There is a cut-off cable (connected to the power unit) located just below the metal overhead conduit which "kills" power to the motor preventing damage to the top of the car, if the lift operator was not paying attention.
Dual cylinders	Master and slave column, to assist with lifting of vehicles.
Dynamic test 115% of the rate capacity	Ensures the hoist works correctly through its full cycle of operation
Static test: 150% of the rated capacity	Static load testing, to unsure the lifts can handle the recommended tonnage. Safety test.
Preset related loading	Designed to avoid overload running
ABS control box, 24v low voltage control system	Conforms to ISO standards and electrical components of the lift.
High quality seals from Italy	Seals can withstand high pressure and mechanical stress.
Quality power rack	Ensures safety at all heights.
Conforms to CE requirements	The CE Mark on a product or machine identifies it as complying with all the of safety requirements established by the European Union.
Easy to install	Requires a flat floor and solid concrete base for bolting.
Training available	Technicians can be professionally trained to use the machine and get the maximum benefit from it.
1 year warranty	The machine will be repaired if there are any factory faults.


Spares available	Should you have a breakdown you will not have to wait for your machine to be repaired. If there is anything we don't have, we fly it in directly from the Suppliers.
Operational videos	Technicians can learn how to operate the machine by watching a video, which is easier and more simple than written instructions.


Important notice!


- Lift must be installed indoors.
- Approved installers must be used when installing lifts or warranty will be void.
- All electrical connections must be done by a qualified Electrician, and each unit requires a separate isolator.

Technical information	
Lifting capacity	4500 kg
Lifting height	1930 mm
Min height	90 mm
Lifting time	50s
Voltage	220v
Power	18MPa/2.2kW
Inside width	2850 mm
Post height	3892 mm
Dimensions	2860*570*770 mm
	825*225*312 mm
	1260*370*210 mm
Weight	710 kg



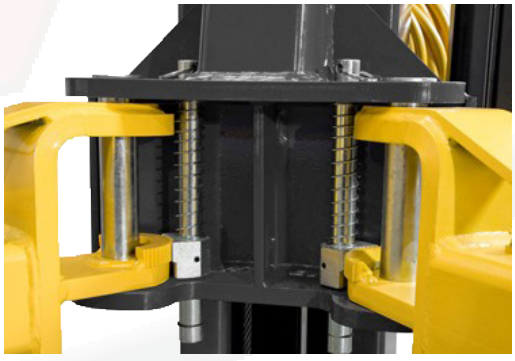

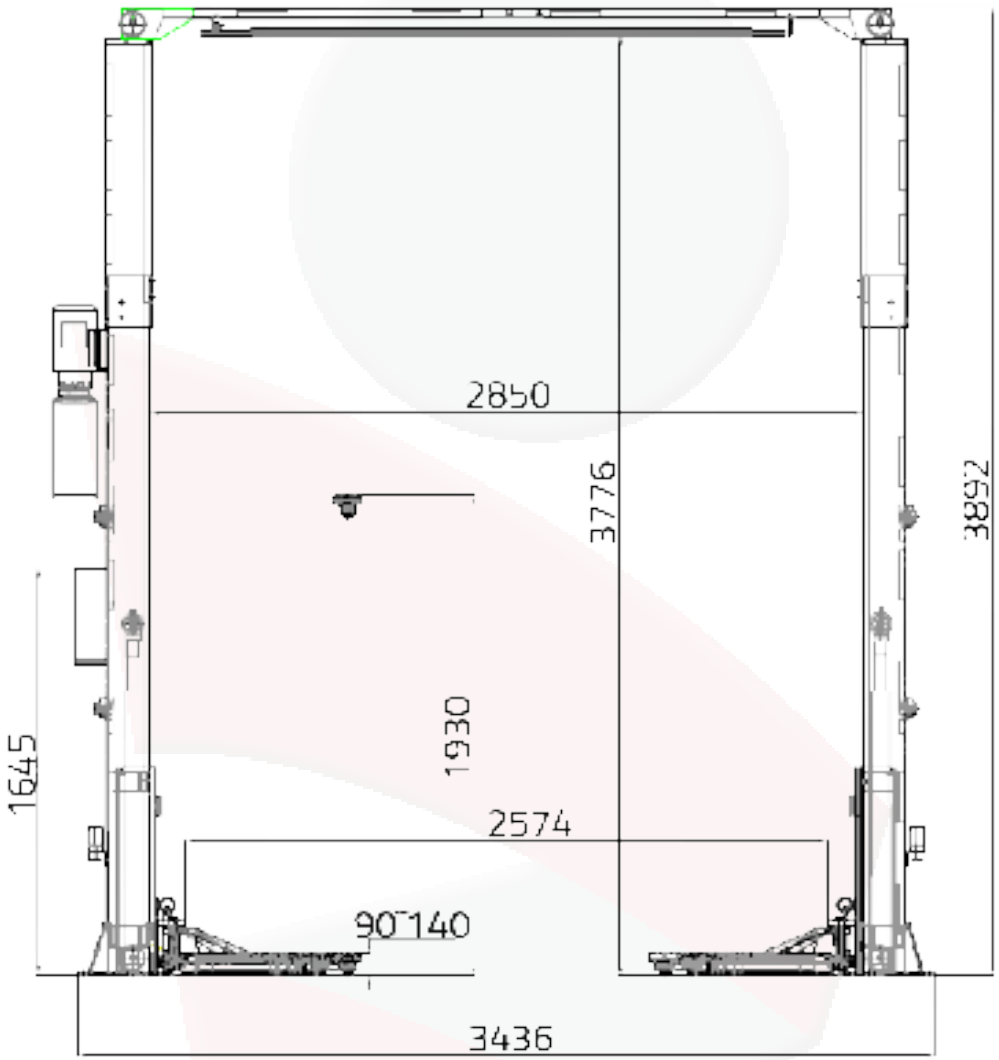

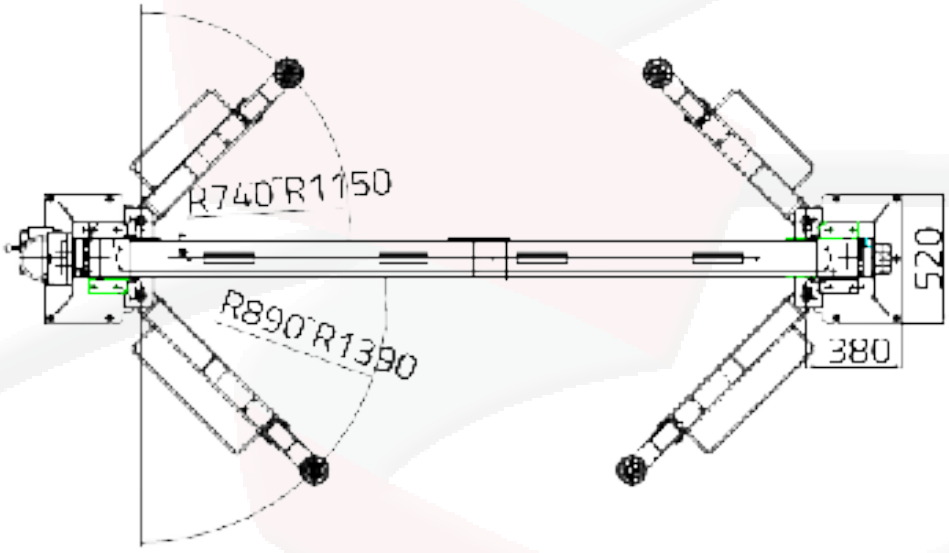

INTEGRATED MARKETING
Unit 10, Keymax Ind Park
1006 Ergon street
Lyttelton Manor
Centurion
012 664 3556
sales@integratedmarketing.co.za
info@integratedmarketing.co.za
www.integratedmarekting.co.za