

Auto



WINNTEC

Y471147HD

Tyre & wheel smart cart
(200kg max weight capacity)



012 664 3556

071 464 0250

sales@integratedmarketing.co.za

Model: Y471147

Product: Tyre cart


Description: Finally there's a product that really does the job ! This long life, light weight, high capacity cart allows the tyre fitter to maneuver heavy wheel sets in the most ergonomic way with the help of its patented tilting system. The cart has been developed in partnership with some of Europe's leading tyre service chains. It comes in stainless steel (robotic welding) with high strength components. With just 17kg this lightweight cart handles wheels from 13" – 20" up to 200kg.

Features:	Benefits:
Push-slide-secure automatic locking system	Eliminates the need for inefficient, wear sensitive, foot operated - or hand controlled jaws. Designed to offer an innovative and secure method for locking the tyres in place during transportation or storage.
Yellow colored foam filled tyres	Maintenance free and leave no traces on the workshop floor.
Wheels run on industrial bearings	Contribute to the overall performance, efficiency, and durability of the cart
Powder coated steel frame with high strength	Enhances the durability of the cart. Powder coating provides a protective layer that helps resist corrosion, rust, and damage from chemicals or environmental factors. This is crucial in automotive environments where carts may be exposed to various substances.
Ergonomic design with patented tilting system	Engineered to provide efficient, safe, and user-friendly tyre handling in automotive shops. Reduces user fatigue and strain, improving overall comfort during tyre handling tasks.
Patented Tilting System	Enables controlled and efficient loading/unloading of tyres, enhancing maneuverability and ease of use.
Training available	Technicians can be professionally trained to use the wheel dolly and get the maximum benefit from it.
1 year warranty	The equipment will be repaired if there are any factory faults and can be replaced if required.
Spares available	Should you have a breakdown you will not have to wait for your equipment to be repaired. If there is anything we don't have, we fly it in directly from the Suppliers.

Easy to operate:

- Simply push the tyre cart toward the stack of tyres and watch as the spring-action arms grasp the tyres without the need for cumbersome pedals, levers, or gas springs.
- Tip the tyre cart toward you – note the tilting-action. This allows for less stress on the technician.
- Use the Push / Pull Handle to remove the cart from the tyre stack

Technical information	
Weight	25kg
Capacity	150kg
Frame width	680mm
Frame depth	470mm
Frame height	280mm

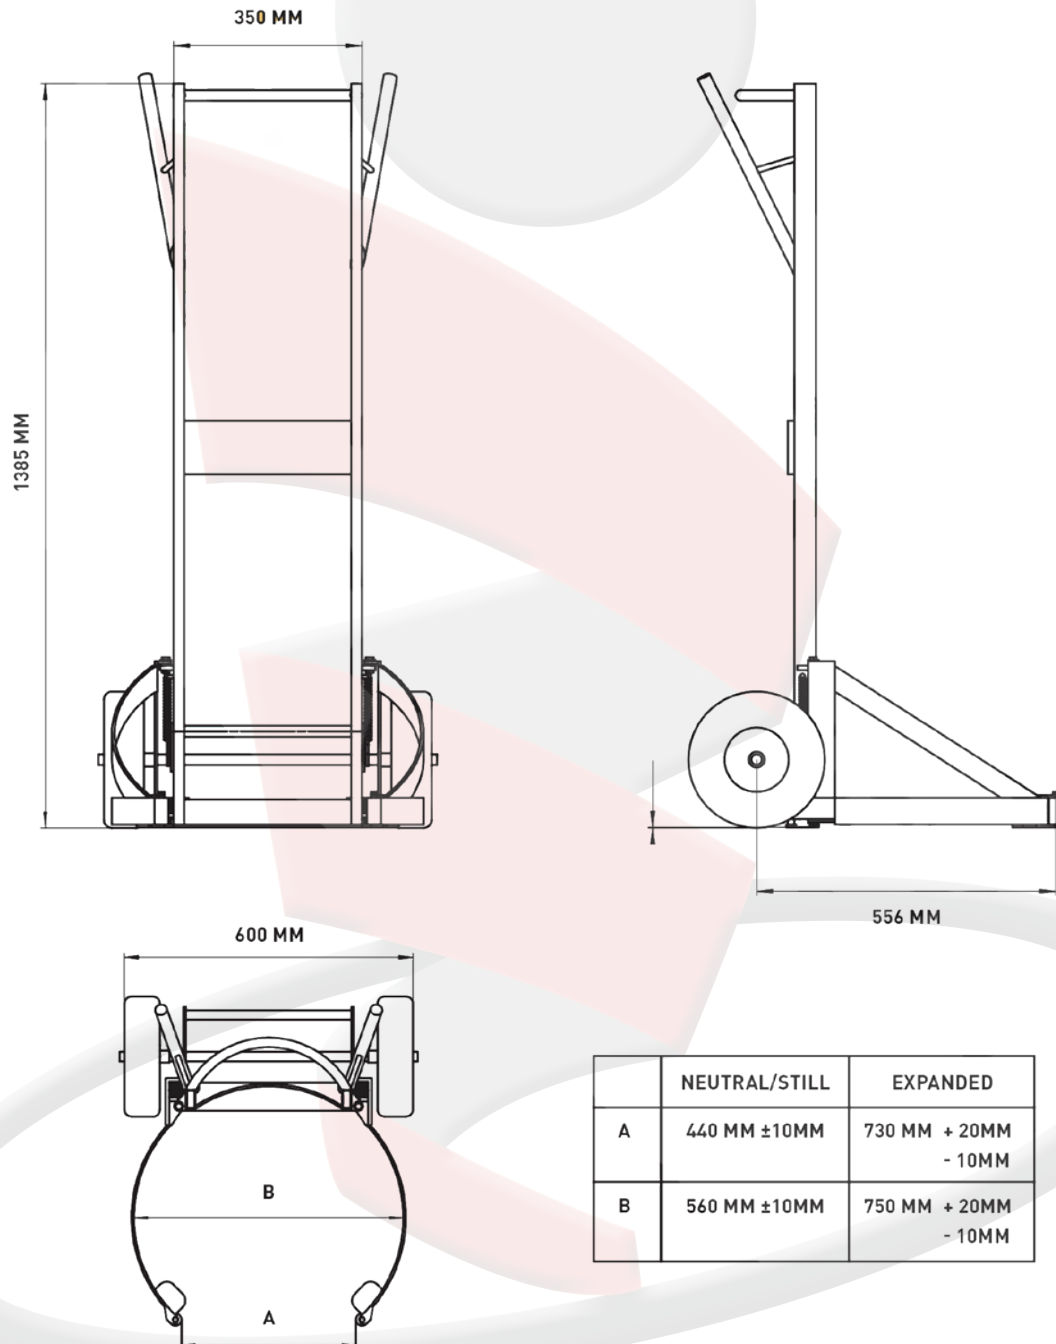

	NEUTRAL/STILL	EXPANDED
A	440 MM $\pm$ 10MM	730 MM + 20MM - 10MM
B	560 MM $\pm$ 10MM	750 MM + 20MM - 10MM